



THRIFT AIRE FILTER

HIGHLIGHTS

- Lightweight aluminum filter
- Special design for maximum dust holding capacity
- Low resistance
- Washable and reusable
- Rust resistant

STANDARD SIZE FILTERS

Nominal size (Actual size 1/2" under)	Part Number	Pack Ctn/ Lbs. Ctn
16 x 20 x 1	TA16201N	12 /18 lbs.
16 x 25 x 1	TA16251N	12/22 lbs
20 x 20 x 1	TA20201N	12 /22 lbs.
20 x 24 x 1	TA20241N	12/26 lbs
20 x 25 x 1	TA20251N	12/26 lbs
24 x 24 x 1	TA24241N	12/30 lbs
10 x 20 x 2	TA10202N	12/14 lbs
12 x 24 x 2	TA12242N	12/20 lbs
16 x 20 x 2	TA16202N	12/22 lbs
16 x 25 x 2	TA16252N	12/27 lbs
20 x 20 x 2	TA20202N	12/27 lbs
20 x 24 x 2	TA20242N	12/32 lbs
20 x 25 x 2	TA20252N	12/32 lbs
24 x 24 x 2	TA24242N	12/37 lbs

CONSTRUCTION

The Thrift Aire filter is a lightweight aluminum filter. It consists of multiple layers of aluminum expanded material, assembled in alternating layers to assure maximum filtering and internal loading capabilities.

The media is enclosed in a medium weight aluminum frame, mitered and secured at one corner by rivets. The filter is designed for applications such as light industrial, commercial, schools, and office buildings where a lightweight permanent filter is recommended.

Maximum operating temperature on the Thrift Aire Filter is 240 degrees F.

Available in both standard and special sizes.
Available in 3" and 4" thicknesses.


MATERIAL

Filtering element shall be processed from sheet aluminum, commercially known as 3003-H22, .025 in thickness expanded to .050 strand. Frame shall be made from sheet aluminum 3003-H14, .025 thickness.



UL Classified. See complete marking on product.

AIR DELIVERY DATA

AIR FLOW VS RESISTANCE CLEAN DEVICE

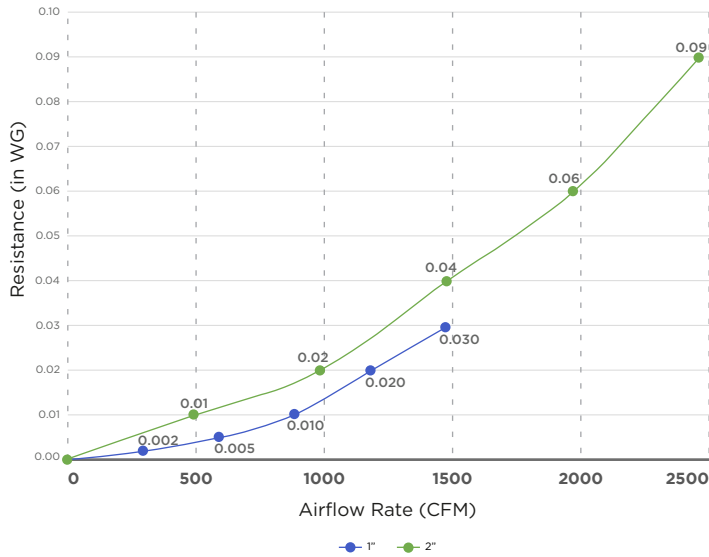

INITIAL PARTICLE SIZE REMOVAL EFFICIENCY

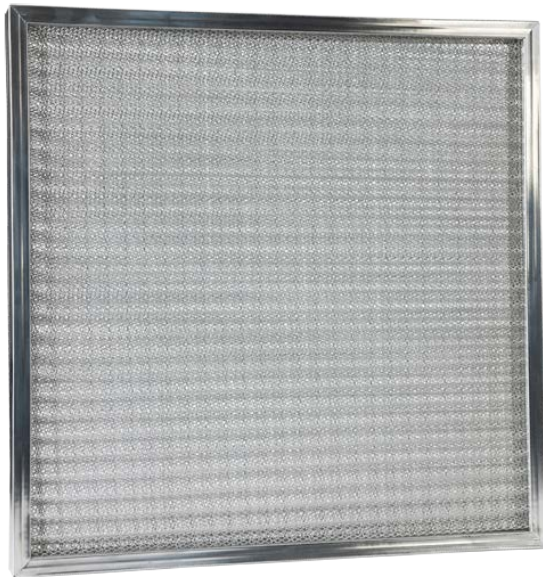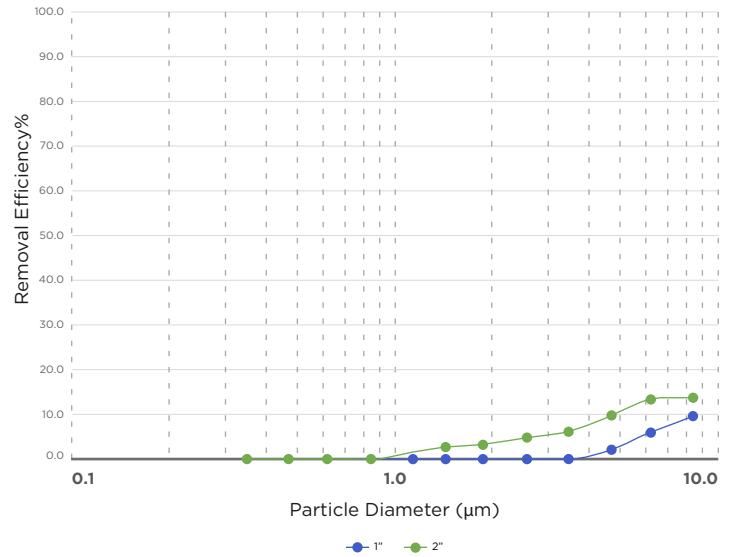

For questions and orders contact
Rensa Filtration at info@rensafiltration.com
or visit rensafiltration.com

Smith Filter Corporation
5000 41st Street Court Moline, Illinois
800-447-4009 | www.smithfilter.com