




COOK MFG

MIXING & STORAGE ROOM BROCHURE



Backed by a
1 Year
Manufacturer's
Warranty



Engineered for
Demanding
Applications




Easy Nut and Bolt
Assembly



Cost Effective Modular
and Expandable Design

STANDARD CONSTRUCTION:

- Heavy duty 18 ga galvanized panels with pre-punched holes for easy nut and bolt assembly

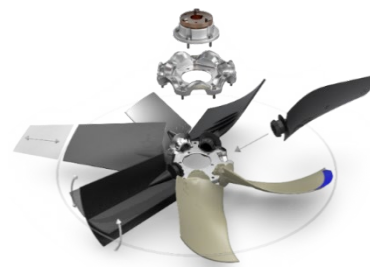

OPTIONAL CONSTRUCTION:

- White powder coated panels
- Stainless steel panels
- Integrated spill containment system
- Pressurized intake air system



CUSTOMIZATION:

- Personnel door location

TUBE AXIAL FAN:

- Non sparking polypropylene blade with aluminum hub
- 1/2 Hp TEFC motor mounted outside of the air stream
- Dual heavy-duty pillow block bearings
- Durable powder coated finish



FILTRATION:

- Filtered intake and exhausted air

CONTROLS:

- Optional motor starter or VFD for fan operation
- Optional full control package

LIGHTING:

- Hazardous and explosion proof options



PERSONNEL ENTRY DOOR:

- Heavy duty personnel entry door with observation window

COMPLIANCE:


- Meets or exceeds NFPA 33 and OSHA 1910 requirements

STORAGE CAPACITY:

- If located within 6' from the spray area.
 - 2 gallons per square foot of enclosed area.
 - Maximum of 120 gallons.
- If located further than 6' from the spray area.
 - 2 gallons per square foot of enclosed area.
 - Maximum of 300 gallons.
- If more than one mixing room is installed, the total quantity of liquids shall not exceed what is outlined above.
- Where liquid storage cabinets are used, storage capacity may be increased by 100%.

OPTIONAL ACCESSORIES:

- Access Ramp
- Paint booth connection vestibule
- Controls package
- Exhaust ductwork and accessories
- Integrated shelving and work surfaces
- Liquid storage cabinets

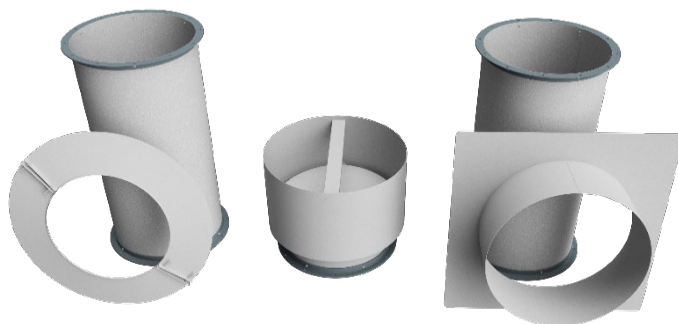

NAMING CONVENTION:

MSR - 072 - 096 - 144 - T - 1

