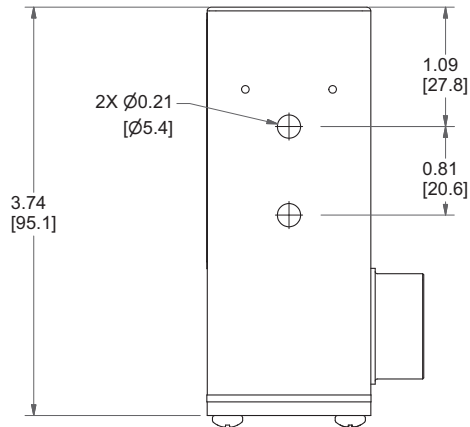
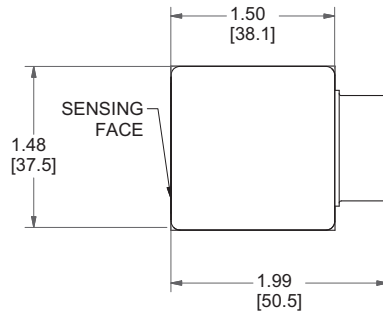


MODEL NUMBER

21-11110-00


PRODUCT LINE

GO Switch 10/20 Series

SPECIFICATIONS

Model	21 Model
Contact Form	SPDT (Form C)
Sensing Range	Standard approx. 3/8" side
Outlet Position	Behind sensing area
Enclosure Material	Standard Enclosure
Area Classification	CSA/FM Cl I, Div 2
Wiring Options	Terminal block - 1/2" NPT
Regional Certification	No regional certification
Custom Field	TopWorx Certified: IP 66/67/68, NEMA 4x/6/6P

WIRING DIAGRAM

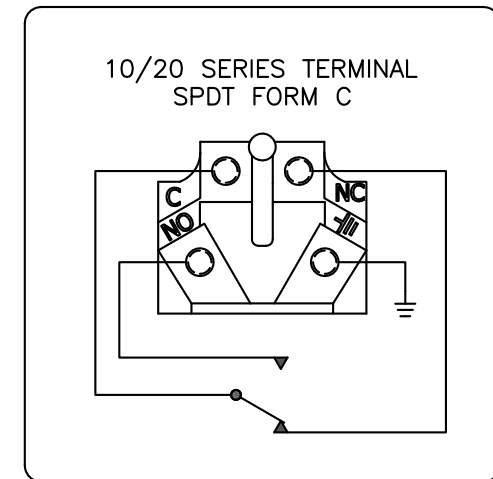

Current as of November 18, 2024 – Subject to change without notice.

NAMEPLATE

GO SWITCH
3300 Fern Valley Road
TopWorx 40213, USA
CL I/II/III, GRPS A,B,C,D, CL II DIN I, GRPS E,F,G, CL III
T5/T4: 50°C T6: 60°C/80°C
ELECTRICAL RATING: 120VAC/10A, 24VDC/1A RESISTIVE, 480VAC/24VDC MAX
LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE
CAUTION: KEEP COVER TIGHT WHILE CIRCUITS ARE LIVE.



GO SWITCH

Model #:

Serial #:

TOPWORX

3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com