



VARIATIONS	
PART NUMBER	DESCRIPTION
GWK0600	6" DIA GUY WIRE KIT
GWK1000	10" DIA GUY WIRE KIT
GWK1200	12" DIA GUY WIRE KIT
GWK1500	15" DIA GUY WIRE KIT
GWK1600	16" DIA GUY WIRE KIT
GWK1800	18" DIA GUY WIRE KIT
GWK2000	20" DIA GUY WIRE KIT
GWK2400	24" DIA GUY WIRE KIT
GWK3000	30" DIA GUY WIRE KIT
GWK3400	34" DIA GUY WIRE KIT
GWK3600	36" DIA GUY WIRE KIT
GWK4200	42" DIA GUY WIRE KIT
GWK4800	48" DIA GUY WIRE KIT
GWK5400	54" DIA GUY WIRE KIT
GWK5600	56" DIA GUY WIRE KIT
GWK6000	60" DIA GUY WIRE KIT

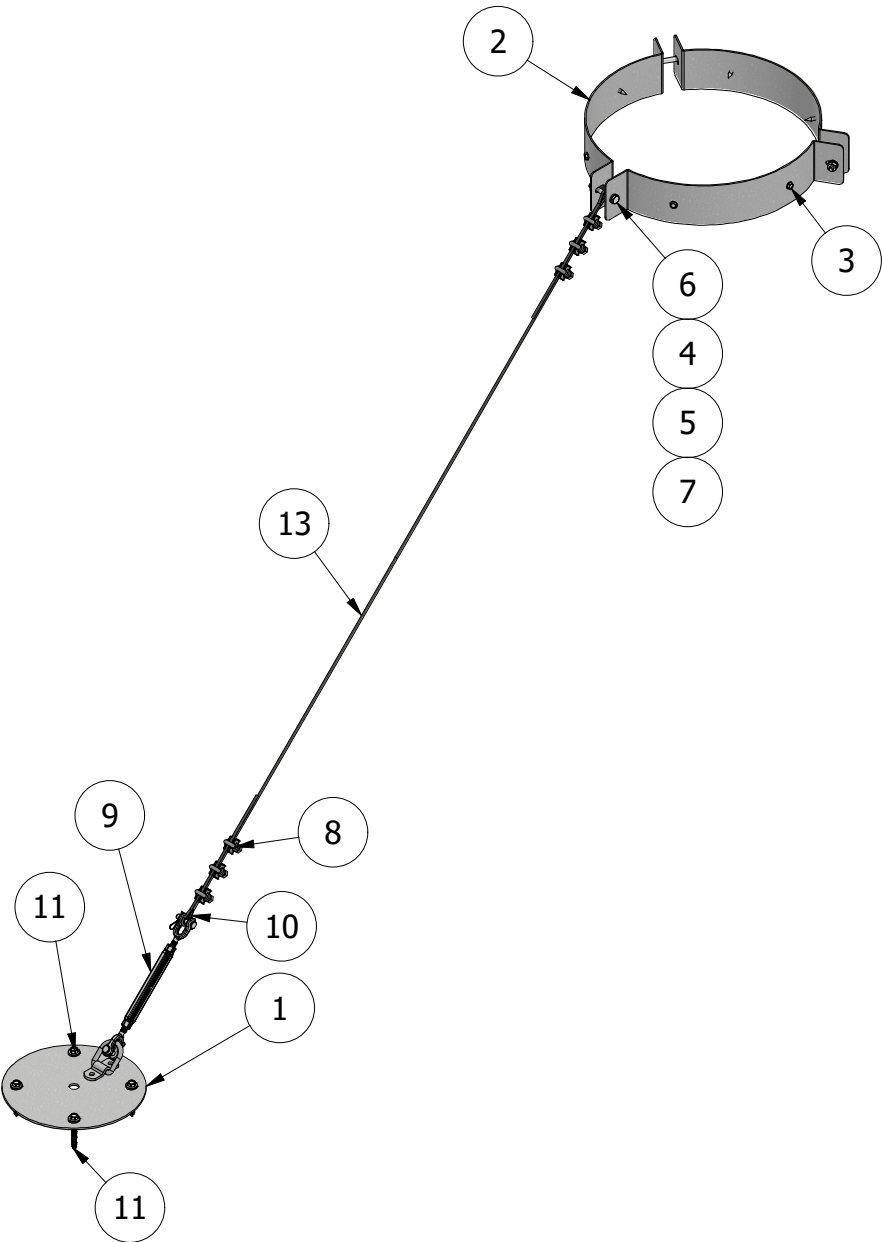

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	3	BKT0066	GUY WIRE TIE DOWN BRACKET
2	3	GWS__00	__" DIA DUCT SLEEVE
3	6	HW0006	#10-16 X 3/4 SELF PIERCING SCREW - ZINC
4	6	HW0065	1/4 FLAT WASHER - GR5 - ZINC
5	3	HW0070	1/4 SPLIT LOCK WASHER - GR 5 - ZINC
6	3	HW0074	1/4-20 X 1-3/4 HHCS - GR5 - ZINC
7	3	HW0162	1/4-20 HEX NUT - GR5 - ZINC
8	18	HW0286	1/8 DIA WIRE ROPE CLAMP
9	3	HW0287	GALVANIZED STEEL TURNBUCKLE
10	6	HW0288	1/8" WIRE ROPE THIMBLE, CLOSED END
11	12	HW0302	SEALING ROOFING SCREW
12	12	HW0304	DRILLING SCREW WITH WASHER
13	50	RM0103	1/8" DIAMETER AIRCRAFT CABLE, GALVANIZED (FT)

- NOTES:**
- 1. MATERIAL: 1/8" DIAMETER WIRE ROPE, WITH BAGGED LOOSE HARDWARE
 - 2. FINISH: GALVANIZED
 - 3. GWK-1200 SHOWN

AUTHOR WMELCHER		REV DATE 2/13/2025		 <i>COOK MANUFACTURING</i>		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES						
TITLE						
GUY WIRE KIT						
TOLERANCES 3 PLACES ± .020 2 PLACES ± .060 HOLES ± .010 FRACTIONS ± .125 ANGLES ± 2°				SIZE	DWG NO	REV
				B	GWK.idw	C
				SCALE	SHEET 1 OF 2	
				1 / 10		

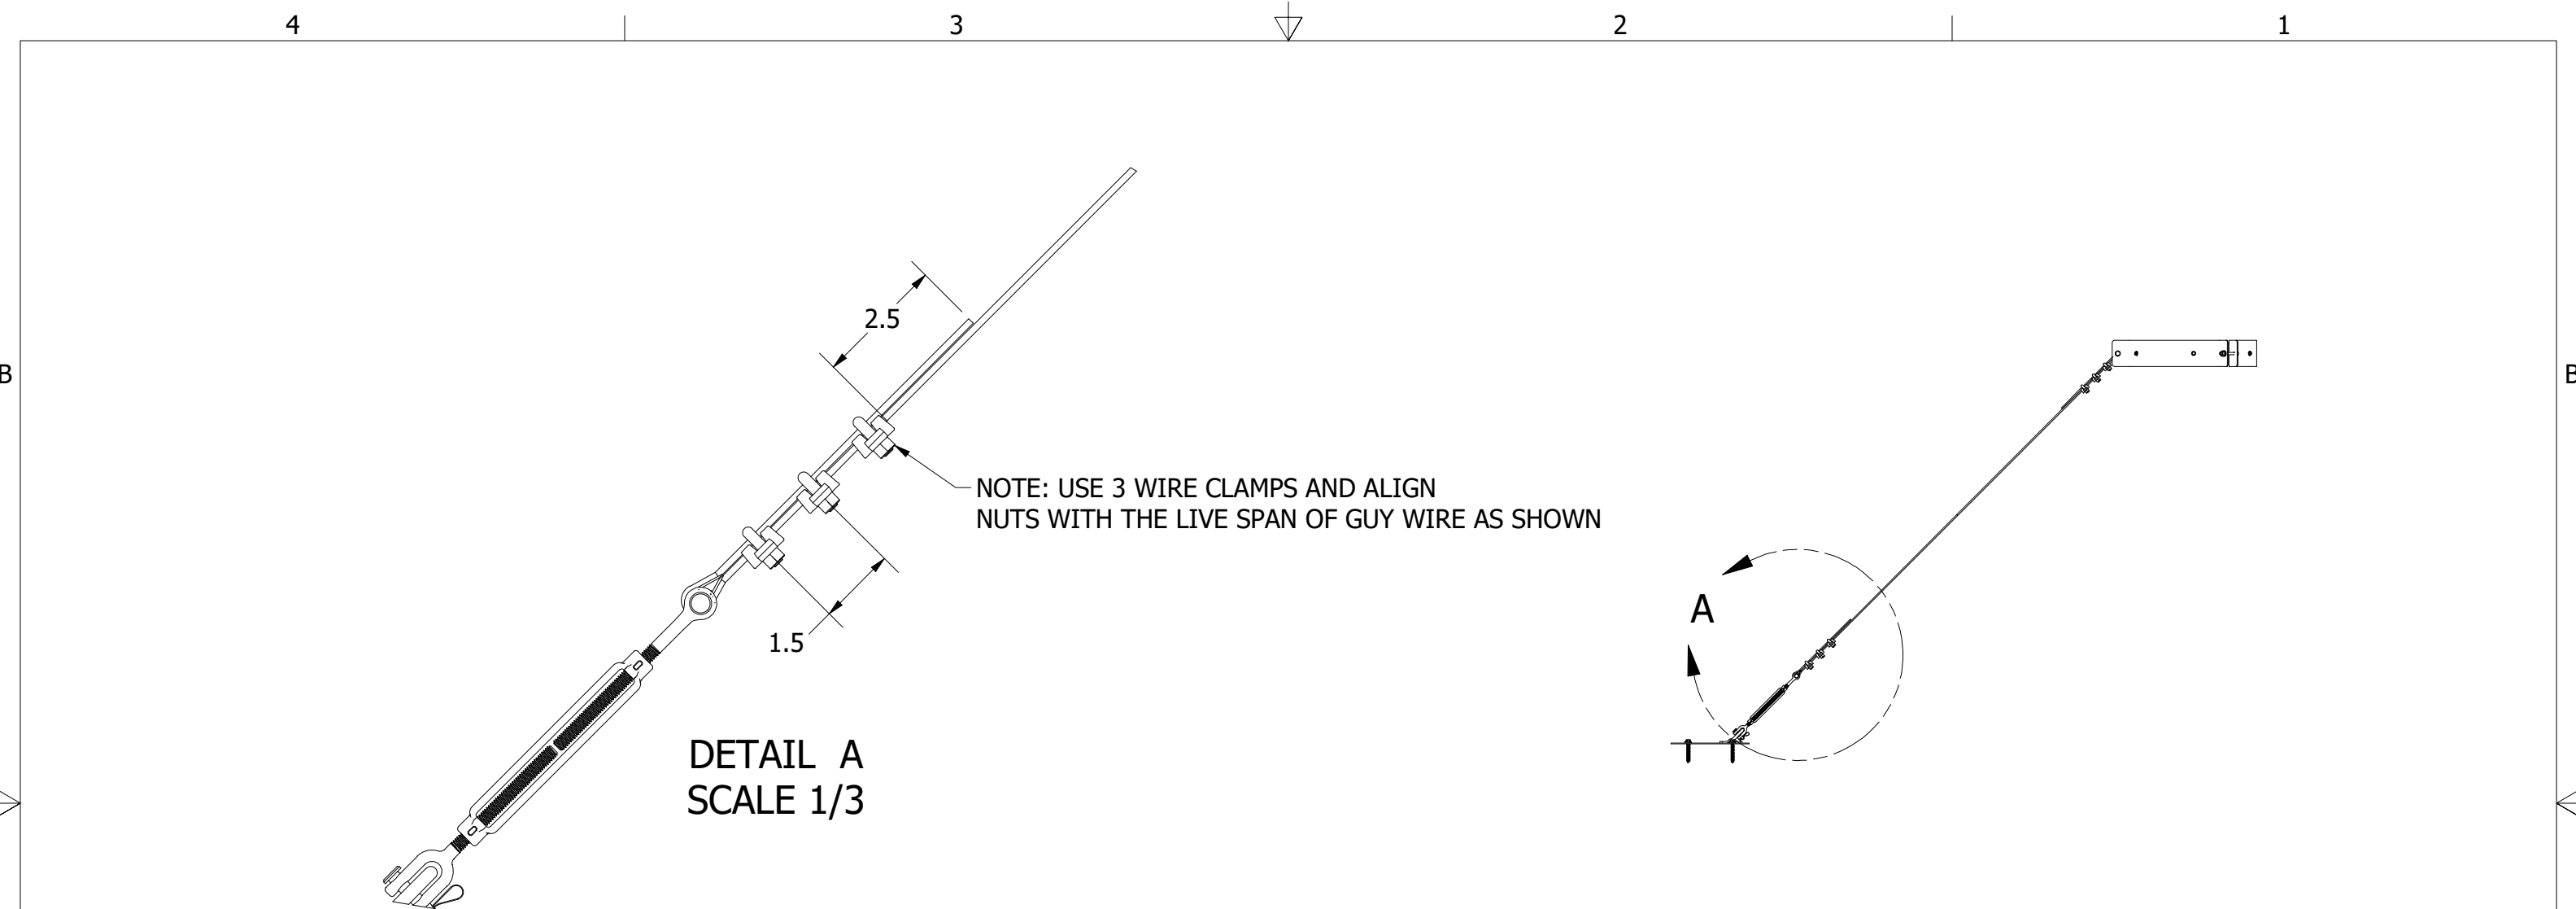

DETAIL A
SCALE 1/3

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	3	BKT0066	GUY WIRE TIE DOWN BRACKET
2	3	GWS__00	__" DIA DUCT SLEEVE
3	6	HW0006	#10-16 X 3/4 SELF PIERCING SCREW - ZINC
4	6	HW0065	1/4 FLAT WASHER - GR5 - ZINC
5	3	HW0070	1/4 SPLIT LOCK WASHER - GR 5 - ZINC
6	3	HW0074	1/4-20 X 1-3/4 HHCS - GR5 - ZINC
7	3	HW0162	1/4-20 HEX NUT - GR5 - ZINC
8	18	HW0286	1/8 DIA WIRE ROPE CLAMP
9	3	HW0287	GALVANIZED STEEL TURNBUCKLE
10	6	HW0288	1/8" WIRE ROPE THIMBLE, CLOSED END
11	12	HW0302	SEALING ROOFING SCREW
12	12	HW0304	DRILLING SCREW WITH WASHER
13	50	RM0103	1/8" DIAMETER AIRCRAFT CABLE, GALVANIZED (FT)

INSTRUCTIONS:

1. APPLY WIRE CLAMPS
2. TIGHTEN TURNBUCKLE TO 40 LB TENSION
3. RE TORQUE WIRE CLAMP NUTS TO 20 FTLB MIN
4. INSPECT WIRE AND TERMINATIONS EVERY 3 MONTHS FOR CORROSION AND SLACK

AUTHOR WMELCHER		REV DATE 2/13/2025		 <i>COOK MANUFACTURING</i>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		TITLE			
TOLERANCES 3 PLACES ± .020 2 PLACES ± .060 HOLES ± .010 FRACTIONS ± .125 ANGLES ± 2°		 THIRD ANGLE PROJECTION		GUY WIRE KIT	
				SIZE B	DWG NO GWK.idw
		SCALE 1 / 15		SHEET 2 OF 2	